


Premium Screenprinter's Duct Tape

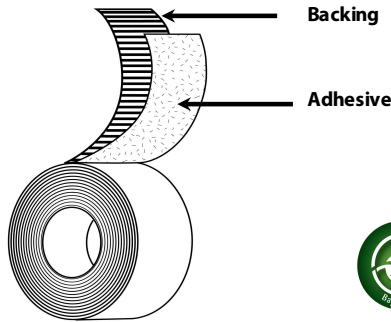

Backing:	PE Coated Cloth
Adhesive:	Rubber
Liner:	N/A
Colors:	White
Specifications:	N/A
Standard Sizes:	48mm x 55m, 72mm x 55m

Applications

- Blocking tape for screen print frames
- Can and barrel sealing
- Sealing tape for sidewall building materials
- Media-blast protection
- Waterproof packaging
- Carpet pad splicing

Features

- PE-Coated Cloth Backing
- Natural Rubber Based Adhesive

Benefits

- High tensile strength for difficult applications
- Tough and durable
- Extremely conformable
- Crisp, straight tear
- Moisture, solvent, and abrasion resistant
- Aggressive adhesion to all surfaces

Typical Test Values

	Standard UOM	Metric UOM	Test Method
Total Thickness	12.0 mils	0.305 mm	ASTM D-1000
Adhesion to Steel	75 oz/in	8.21 N/cm	PSTC-101
Adhesion to Backing	30 oz/in	3.28 N/cm	PSTC-101
Tensile Strength	33 lb/in	57.79 N/cm	ASTM D-1000
Operating Temperature	40 to 200 °F	4 to 93 °C	
VOC Content	<1 g/L		

Recommended Storage Conditions: 60-80 °F at 40-60% RH
 Standard Shelf Life (at 25 °C): 36 months from date of manufacture.

The information presented herein was prepared at BERRY GLOBAL, INC (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To BERRY's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY assumes any legal responsibility.